

Pressure Sensor - EPT3100



- Up to 4000 Bar pressure range
- High strength, rugged stainless steel design
- Competitively priced

The **EPT3100** is a high quality all stainless steel pressure transducer, intended for use in the measurement of gases and liquids compatible with stainless steel.

The **EPT3100** is suitable for automotive, industrial hydraulics, refrigeration, off-road, construction and agricultural applications.

With additional EMI / RFI protection, low static and thermal errors and high resistance to shock and vibration as standard, the **EPT3100** assures trouble free operation at temperatures up to 125°C.

The **EPT3100** piezo resistive sensing element coupled with the latest ASIC circuitry, assures excellent accuracy, choice of high level outputs and long stability, protected within a rugged, stainless steel housing.

The **EPT3100** high strength stainless steel construction contains no silicone oil and no internal O- rings. Measurements are available in gauge and absolute pressure, with ranges up to 4,000 bar and are backed by a one-year warranty.



Specification

Performance		Electronics	
Accuracy	< +/-0.5% at RT	Excitation	5 VDC at 0,5 - 4,5 V, 10 - 32 VDC at 0 - 5 V, 1 - 5 V, 0 -10V, 4...20 mA
Stability (1 Year)	< ± 0.1 %	Output impedance	< 100 Ω
Overrange pressure	up to 2x rated pressure	Current consumption	< 10 mA
Burst pressure	up to 5x rated pressure	Reverse voltage protection	Yes
Pressure cycles	> 10 million	Mechanics	
Environment		Housing incl. wetted parts	304 stainless steel
Temperature	-40° to 125°C	Pressure port	see select table
Shock	1000 G, 11 msec., 1/2 Sine	Electrical connection	see select table
Vibration	25 G peak, 20 to 2000 Hz	Weight	ca. 60 g
Sealing	IP 66, optional IP69K		

Ordering Information

(Please use the characters in the chart below to construct your product code)

Sample Code: **EPT3100 - A - 01000 - B - 4 - A**

Series	Port Configuration	Pressure Range	Pressure Unit	Output Signal	Electrical Interface
EPT 3100	A - G 1/4" Male B - 1/4" NPT Male C - 1/8" NPT Male D - 7/16" -20 UNF Male E - 9/16" -18 UNF Male F - M14x1.5 Male G - 1/4" SAE Female H* - 3/8x24 UNF Male (Dash Size 3) M10 - M10 x 1	Please use code from table below	A - absolute pressure B - gauge pressure C - vacuum pressure	1 = 0..10 V 2 = 4..20 mA 3 = 1..5 V 4 = 0..5 V 5 = 0,5..4,5 V ratiometric	A - 600 mm cable B - Miniature EN175301-803-C connector C - Packard Metripac connector D - Standard EN175301-803-A connector F - M12x1 Round connector K** - Moulded cable

Custom options available on request

* Standard option
** Sealing IP69K

Pressure Range																					
Bar	0,6	1,0	1,6	2,5	4	6	10	16	25	40	50	60	100	160	250	400	600	1000	1600	2000	4000
Order Code	00060	00100	00160	00250	00400	00600	01000	01600	02500	04000	05000	06000	10000	16000	25000	40000	60000	100000	160000	200000	400000


The EPT3100 series is backed by a 1 Year Warranty. The purchaser is responsible for compatibility of the media, functional adequacy and correct installation of the transmitter.

Pressure Sensor - EPT3100




Dimensions


Packard Metripac connector

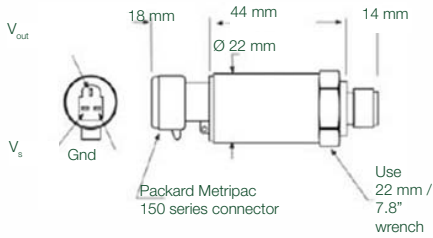

DIN EN 175301-803 connector

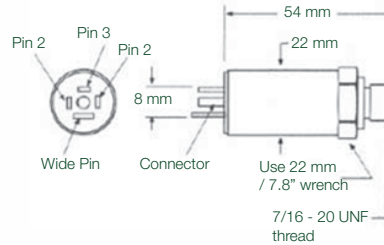

Cable assembly

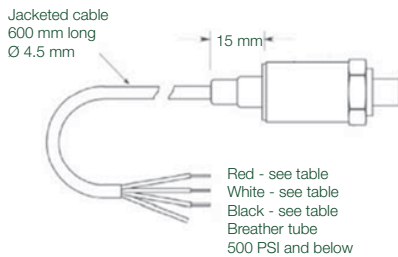

Wiring

Type	Output	PIN 1	PIN 2	PIN 3	PIN 4
 DIN EN 175301-803-A and C	0.5 - 4.5V, 1 - 5 V, 0 - 10 V	+ Supply	- Supply	Output +	-
	4..20mA	+ Supply	Current output -	N/A	-
 Round connector M12x1 B	0.5 - 4.5V, 1 - 5 V, 0 - 10 V	+ Supply	N/A	- Supply	Output +
	4..20mA	+ Supply	N/A	Current output -	N/A
 Packard Metripac	Output	PIN A	PIN B	PIN C	-
	0.5 - 4.5V, 1 - 5 V, 0 - 10 V	- Supply	+ Supply	Output +	-
 Cable assembly	Output	Red	Black	White	-
	0.5 - 4.5V, 1 - 5 V, 0 - 10 V	+ Supply	- Supply	Output +	-
	4..20mA	+ Supply	Current output -	N/A	-